




## Seamless Copper Water Tubing

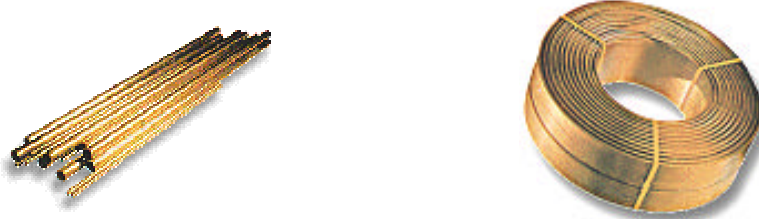

Seamless Water Tubing is made from alloy UNS C12200 DHP Copper  
 Seamless Copper Water Tubing meets ASTM B 88 Fed. WW-T-799

*Type K – Domestic Water Service, Fire Protection, Solar, Fuel Oil & HVAC.*

*10', 20' Straight Lengths, Hard Temper, Coils in Soft Temper.*

*Type L – Domestic Water Service, Fire Protection, Solar, Fuel Oil, HVAC and Natural Gas.*

*10', 20' Straight Lengths, Hard Temper, Coils in Soft Temper.*

*Type M – Domestic Water Service, Fire Protection, Solar, Fuel Oil & HVAC.*

*10', 20' Straight Lengths, Hard Temper.*

### Dimensions and Physical Characteristics of Copper Water Tube<sup>1</sup>

Nominal or Standard Size (inches)	TYPE K			TYPE L			TYPE M		
	Nominal Dimensions (inches)								
	O.D.	I.D.	WALL	O.D.	I.D.	WALL	O.D.	I.D.	WALL
1/4	.375	.305	.035	.375	.315	.030			
3/8	.500	.402	.049	.500	.430	.035	.500	.450	.025
1/2	.625	.527	.049	.625	.545	.040	.625	.569	.028
5/8	.750	.652	.049	.750	.666	.042			
3/4	.875	.745	.065	.875	.785	.045	.875	.811	.032
1	1.125	.995	.065	1.125	1.025	.050	1.125	1.055	.035
1-1/4	1.375	1.245	.065	1.375	1.265	.055	1.375	1.291	.042
1-1/2	1.625	1.481	.072	1.625	1.505	.060	1.625	1.527	.049
2	2.125	1.959	.083	2.125	1.985	.070	2.125	2.009	.058
2-1/2	2.625	2.435	.095	2.625	2.465	.080	2.625	2.495	.065
3	3.125	2.907	.109	3.125	2.945	.090	3.125	2.981	.072
3-1/2	3.625	3.385	.120	3.625	3.425	.100	3.625	3.459	.083
4	4.125	3.857	.134	4.125	3.905	.110	4.125	3.935	.095
5	5.125	4.805	.160	5.125	4.875	.125	5.125	4.907	.109
6	6.125	5.741	.192	6.125	5.845	.140	6.125	5.881	.122
8	8.125	7.583	.271	8.125	7.725	.200	8.125	7.785	.170
10	10.125	9.449	.338	10.125	9.625	.250	10.125	9.701	.212
12	12.125	11.315	.405	12.125	11.565	.280	12.125	11.617	.254

<sup>1</sup> Plumbing and Mechanical codes govern what types of products may be used for applications.

Local codes should always be consulted for minimum requirements.

**Dayco Industries, LLC • 10215 San Sevaine Way • Mira Loma, CA 91752**  
**Call Toll Free: (800) 893-8355 • Local: (951) 360-5900 • Fax: (951) 360-5999**  
**E-mail: sales@daycoindustries.com**